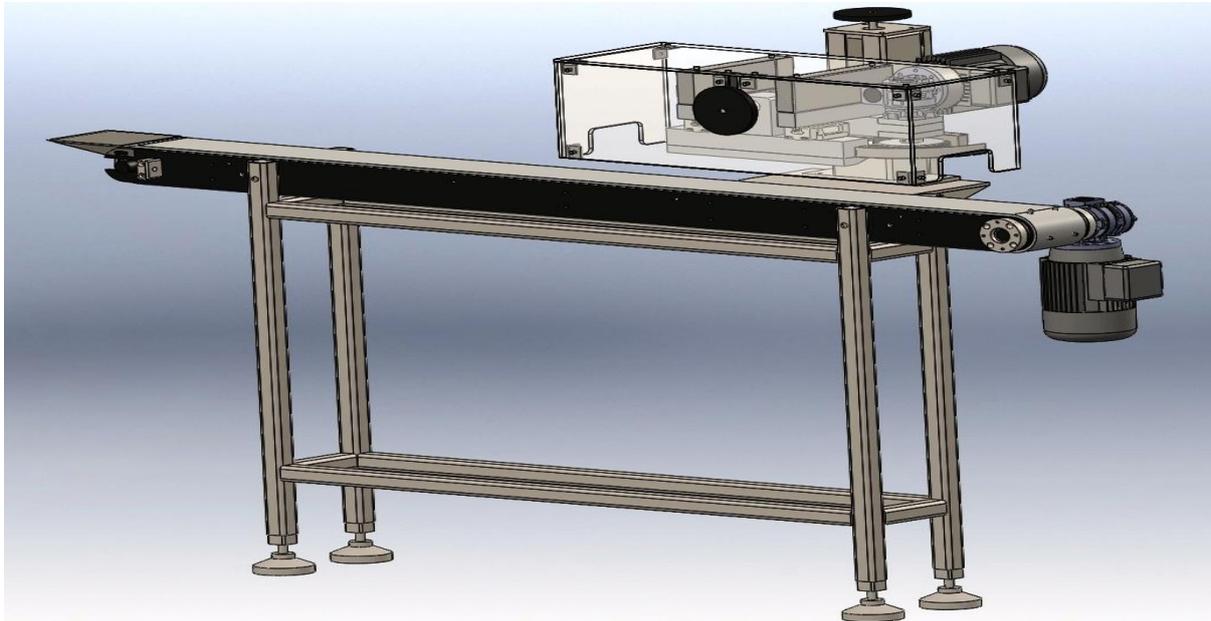




Automatic Bottle Deflashing Machine



Automatic Bottle Deflashing Machine is the perfect labor-saving component to meet the demands of Precise and high-speed bottle Manufacturing Industries. It is also called Bottle Neck Cutting Machine. Bottle Deflashing Machine is designed to provide a flesh removal solution for empty blow moulding containers and delivers them to the downstream equipment conveyor in upright condition after orientation. No longer are employees required to manually sort bottles and remove the flesh with knife or cutter – an otherwise tedious and time-consuming task.

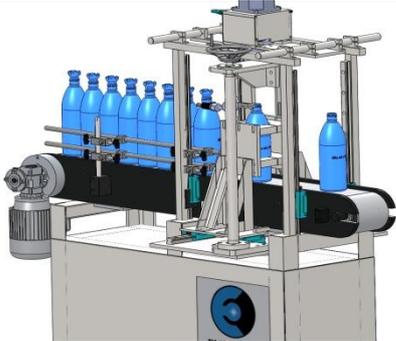
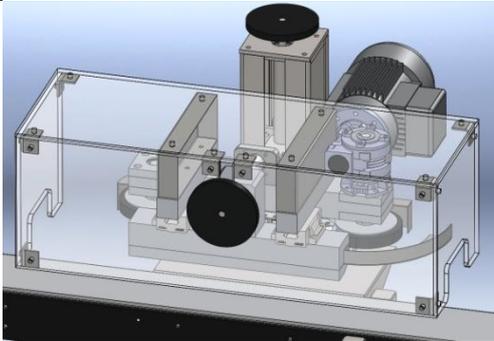
Why Bottle Deflashing Machine?

- **Good Speed** and Fully Automated
- **No changeover parts** at bottle changing which provides minimum time for bottle change
- **Increases efficiency** and **productivity** for production lines
- It can work out for **any shape** like round, oval, square, etc. It is enable for **unsymmetrical shape** of bottles also.
- Contact parts are **resistant to flaking, chipping, scuffing** so will not cause any **cosmetic damage** to containers
- **Saves money** through efficient use of personnel
- **Minimal operator training** required
- **Fast adjustment** reduce downtime and maximize uptime
- Built to be **reliable, trouble-free and dependable** for years of operation
- INDIAN made-easy access to **spare parts** and **service assistance**
- User **friendly & maintenance less** design.
- **Low noise level** at higher speed.





Technical Specifications:

Model Name	ED 15	ED 50
Output/min*	Up 10 to 15 bottles	Up 30 to 50 bottles
Standard Photograph		
Machine Dimension*	1500mm(L) x 1000mm(W) x 1500mm(H)	1800mm(L) x 450mm(W) x 1500mm(H)
Height of exit Conveyor**	800 mm to 1000mm	800 mm to 1000mm
Container Specifications	Diameter	20 mm to 100 mm
	Height	50 to 200 mm

Optional Features:

- **Bottom Flash Remover (Bottom Pinch off)**
- **Camera checking** system after removal of flash.
- **weight checking** system after removal of flash.
- Container **Leak Testing** after removal of flash
- Acrylic or Polycarbonate **enclosure** in frame.
- Online ionized **air cleaning** of containers.
- **Accumulation conveyor** or **Turn Table** of unscrambled containers.
- **Container counting.**
- Online **labelling.**

Utility Requirement:

Electrical Supply	1Ø+ Neutral +Earthing
Voltage & frequency	230V / 50 Hz AC
Electrical Load	0.5 HP
Inlet Air Pressure	5 To 6 Bar
Required air Quantity	0.1 CFM

For more details check website www.eminencemech.com or contact us at info@eminencemech.com

call us at +91 9909902394

